

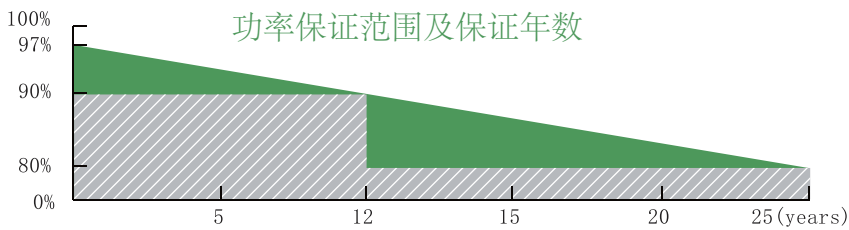


LF340P6-72

- LF320P6-72
- LF325P6-72
- LF330P6-72
- LF335P6-72

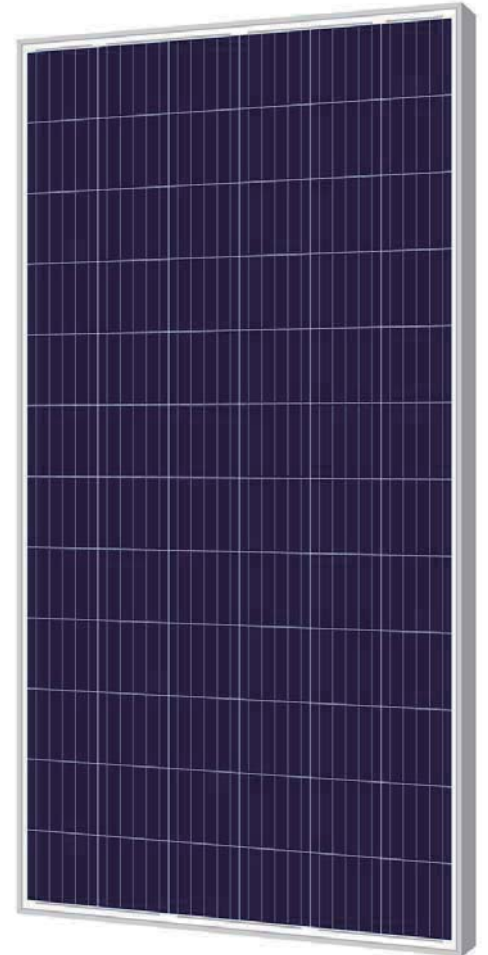

宁波乐丰新能源有限公司

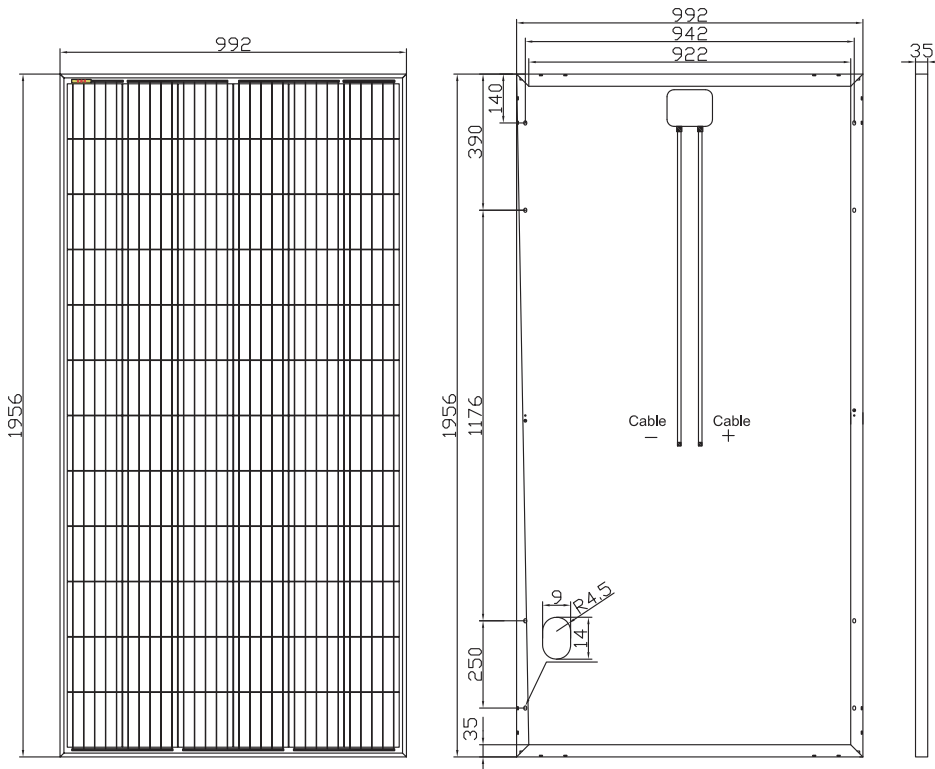

12 年
工艺及材料
质量保证

25 年
80%输出
功率保证



ISO9001
ISO14001
OHSAS18001



高效组件



最大5400Pa
机械载荷



耐盐雾耐氨腐蚀



抗电位诱导衰减

宁波乐丰新能源有限公司

电话: +86-0574-25709777 电话: +86-0574-25758826
 邮箱: Sales@lefn-solar.com
 地址: 中国浙江省宁波市象山县滨海工业园区海和路55号



LF340P6-72

- LF320P6-72
- LF325P6-72
- LF330P6-72
- LF335P6-72



宁波乐丰新能源有限公司

电性能参数

	型号	LF 320P6-72	LF 325P6-72	LF 330P6-72	LF 335P6-72	LF 340P6-72
	最大输出功率	320	325	330	335	340
STC	最大输出功率公差	0-5W	0-5W	0-5W	0-5W	0-5W
1000W/M ²	组件效率(%)	16.49	16.75	17.01	17.26	17.52
组件温度	最大工作电压(V)	38.12	38.30	38.48	38.67	38.73
25°C	最大工作电流(A)	8.39	8.49	8.58	8.66	8.78
A.M.1.5	开路电压(V)	45.15	45.32	45.49	45.66	45.73
	短路电流(A)	8.98	9.08	9.18	9.27	9.39
	短路电流温度系数 (%/°C)			0.050		
	开路电压温度系数 (%/°C)			-0.320		
	功率温度系数 (%/°C)			-0.410		
	标称电池温度NOCT (°C)			45±2°C		

机械性能参数

组件尺寸	1956*992*35mm
重量(Kg)	22.0
线缆	4mm ²
玻璃	高透钢化玻璃3.2mm
接线盒	IP67, 3个旁路二极管, 线长900mm
接线端子型号	兼容MC4接头

工作性能参数


最大系统电压	1000V
最大系列保险丝额定值	15A
机械载荷	5400Pa
工作温度(°C)	-40~+85
应用等级	A

包装配置

集装箱承载	310 件 /20GP
	744 件 /40HC

联系信息

不同辐照度I-V曲线

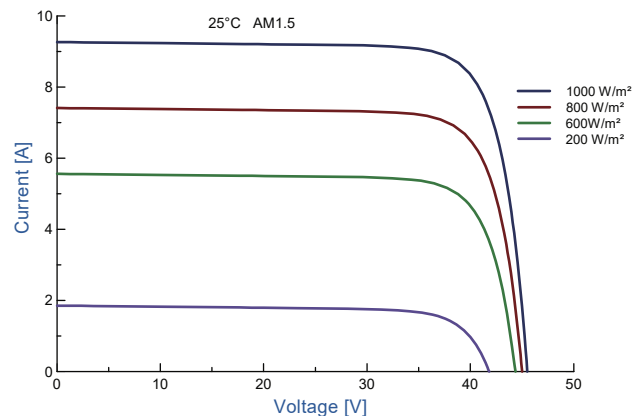

宁波乐丰新能源有限公司

电话: +86-0574-25709777 电话: +86-0574-25758826

邮箱: Sales@lefnSolar.com

地址: 中国浙江省宁波市象山县滨海工业园区海和路55号

