



LF 555M10-72H

- LF535M10-72H
- LF540M10-72H
- LF545M10-72H
- LF550M10-72H

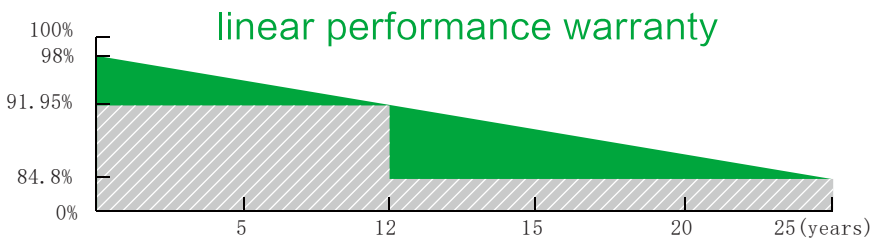

Ningbo Lefeng New Energy Co.,Ltd

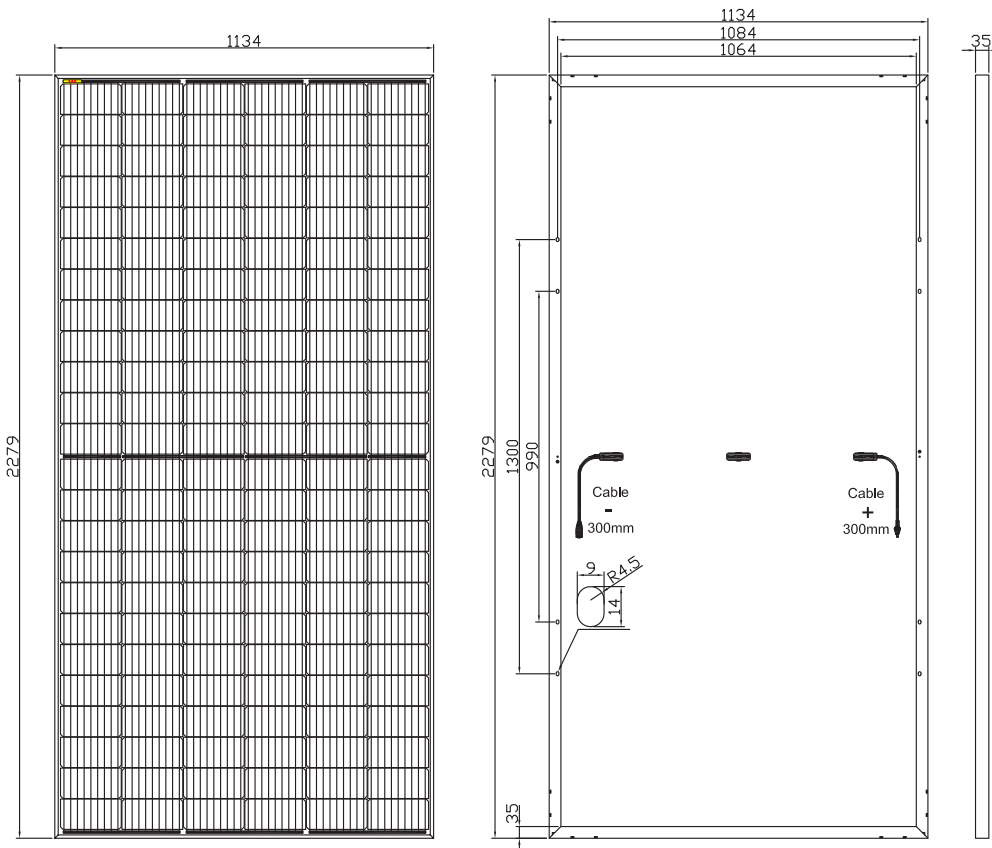

linear performance warranty

12 Years
Material&Craft
Quality
assurance

25 Years
84.8% output
Power
guarantee



ISO9001
ISO14001
OHSAS18001



High Module Efficiency



Mechanical Load
Capability up to 5400Pa



Salt Mist Corrosion Protect
Ammonia Resistance



Potential Induced
Degradation Free

Ningbo Lefeng New Energy Co.,Ltd

Tel: +86-0574-25709777

Tel: +86-0574-25758826

E-mail: Sales@lefnSolar.com

Add: No. 55 Haihe Road, Binhai Industrial Park, Xiangshan County, Ningbo, 315700, China



LF 555M10-72H

- LF535M10-72H
- LF540M10-72H
- LF545M10-72H
- LF550M10-72H



Ningbo Lefeng New Energy Co.,Ltd

Electrical Characteristics

	TYPE	LF 535M10-72H	LF 540M10-72H	LF 545M10-72H	LF 550M10-72H	LF 555M10-72H
STC 1000W/M ² Module Temperature 25°C A.M.1.5	POWER OUTPUT	535	540	545	550	555
	MAXPOWER TOLERANCE	0-5W	0-5W	0-5W	0-5W	0-5W
	MODULE EFFICIENCY (%)	20.7	20.9	21.1	21.3	21.5
	VOLTAGE MPP Vmpp	41.51	41.70	41.92	42.11	42.31
	CURRENT MPP Impp (A)	12.89	12.95	13.00	13.06	13.12
	VOLTAGE OPEN CIRCUIT Voc	49.87	49.95	50.04	50.28	50.53
	SHORT CIRCUIT CURRENT Isc (A)	13.68	13.74	13.80	13.86	13.93
NOCT 800W/M ² Environment Temperature 20°C A.M.1.5	POWER OUTPUT	411.01	414.85	418.69	422.53	426.37
	VOLTAGE MPP Vmpp (V)	37.83	38.01	38.21	38.39	38.57
	CURRENT MPP Impp (A)	10.86	10.91	10.96	11.01	11.06
	VOLTAGE OPEN CIRCUIT Voc (V)	46.04	46.12	46.2	46.42	46.65
	SHORT CIRCUIT CURRENT Isc (A)	11.63	11.68	11.73	11.78	11.83
TEMPERATURE COEFFICIENTS Isc (% / °C)			0.046			
TEMPERATURE COEFFICIENTS Voc (% / °C)			-0.266			
TEMPERATURE COEFFICIENTS Pmpp (% / °C)			-0.354			
NMOT (°C)			43±3°C			

Mechanical Data

DIMENSIONS OF MODULE	2279*1134*35mm
WEIGHT(Kg)	28.5
CABLE	4mm ²
GLASS	High transmission glass 3.2mm
JUNCTION BOX	IP68, 3 Bypass-Diode, 300mm in length
TYPE OF CONNECTOR	Compatible with MC 4 plug

Packaging Configuration


Loading Capacity	155 pcs/20GP
	620 pcs/40HC

Contact Information

Working Conditions

MAX SYSTEM VOLTAGE (VDC)	1500V
SERIES FUSE RATING	25A
MECHANICAL LOAD	5400Pa
OPERATING TEMPERATURE (°C)	-40~+85
APPLICATION CLASS	A

I-V CURVES

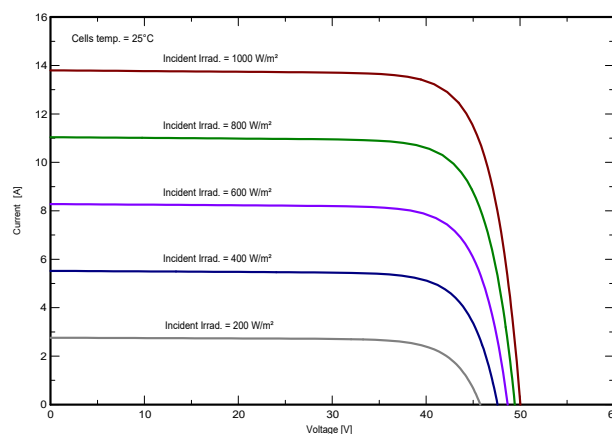

Ningbo Lefeng New Energy Co.,Ltd

Tel: +86-0574-25709777

Mob: +86-0574-25758826

E-mail: Sales@lefnosolar.com

Add: No. 55 Haihe Road, Binhai Industrial Park, Xiangshan County, Ningbo, 315700, China

